

More information:
www.blug.es/eng/productos/



MACHINE TYPE
CLAMSHELL GRAB
WORKING SYSTEM
HYDRAULIC
MATERIAL TO BE HANDLED

STONES, GRAVEL, SAND, MUDS, UNDERWATER WASTES IN DRAINAGE WORKINGS,
 PILED AND BULK MATERIAL UP TO 2,8 t/m³ DENSITY

REFERENCE

CNAH-2,8

p. 32

RELATED PRODUCTS




PNA-3



C2-2,8



CV2-2,8

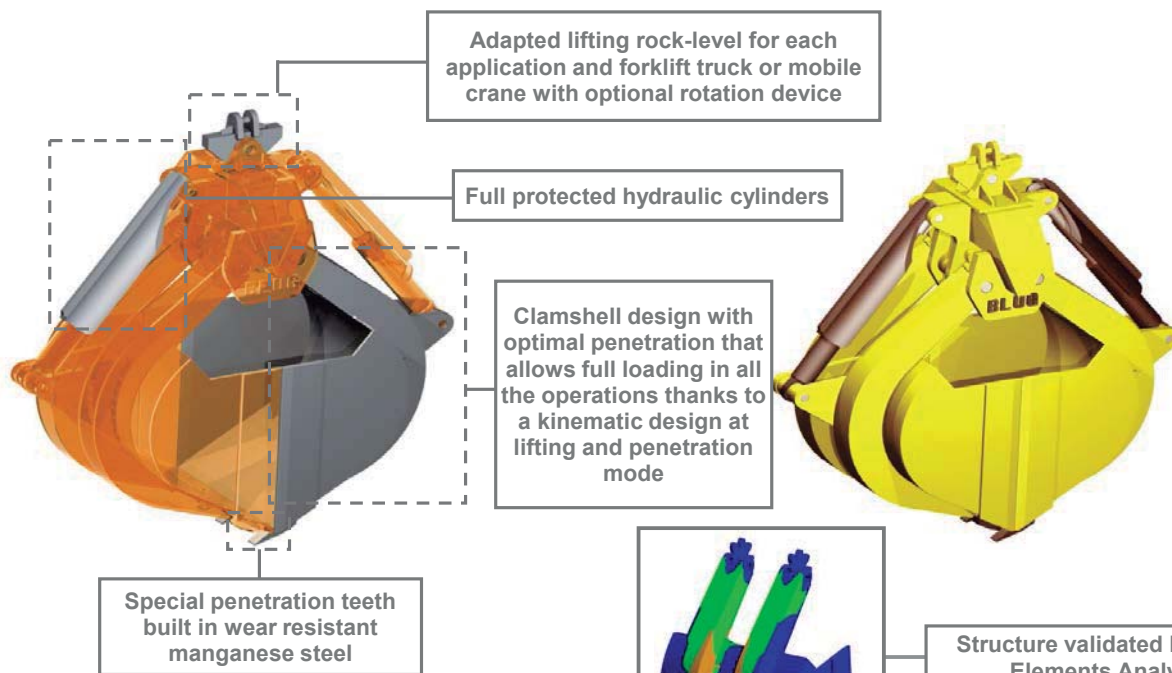


Equipment needed

- Attachment from forklift truck / mobile crane.
- Hydraulic supply from external system.

Technical information

- Robust structure in S355 J2G3 rolled steel.
- Mechanical (120°) or hydraulic (360°) rotation device.
- Reduced height, multi-stable, can work at any angle ($\pm 60^\circ$).
- Design & fabrication according to standard FEM 1001/98 section I.
- CE conformity.

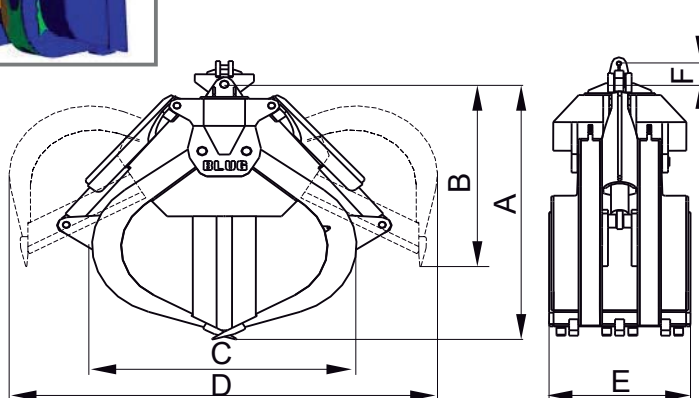

Reference	Capacity	Cylinder quantity	Working pressure	Crane SWL	Weight	Dimensions mm					
	m ³		bar	t	kg	A	B	C	D	E	F
CNAH-250-2,8	0,25	2	250	2,5	1040	2170	1600	1490	1960	420	Depending on forklift truck / mobile crane's suspension
CNAH-400-2,8	0,4	2	250	2,5	1100	2170	1600	1490	1960	610	
CNAH-550-2,8	0,55	2	250	3,2	1180	2170	1600	1490	1960	800	
CNAH-650-2,8	0,65	2	250	3,2	1250	2200	1620	1510	1980	1000	
CNAH-800-2,8	0,8	2	250	4	1320	2200	1620	1510	1980	2000	

SUBJECT TO CHANGE WITHOUT NOTICE.

You can request any model's offer visiting our web site www.blug.es or sending an email to comercial@blug.es